



CAPACITY

- Airflow: 3800-6000 CFM
- VRF combination 10 to 12.5 tons
- Refrigerant type : R-32 and R454-B available*

*Contact your local representative

AIR CONDITIONING/HEATING (Standard)

- Combination DX evaporator (connection with VRF unit) and auxiliary electric heater with SCR modulation.
- DX evaporator connection: liquid (1/2"), gas (1 1/8")
- Economizer feature with free cooling available

CASING (Standard)

- Double-wall enclosure
- 22-gauge galvanized steel
- White pre-painted steel exterior finish
- Access doors with quarter-turn locks
- 22-gauge galvanized steel drain pan
- Drain connections: 1" (25 mm) NPT
- Mistop component to manage possible extra condensation
- Insulation: 2" (51 mm)
- Exhaust and supply weather hoods with bird screens
- Economizer section with motorized, airtight insulated aluminum dampers for fresh, exhaust, and mixed air.

MOUNTING (Standard)

- Standard platform
- 14-inch 11-gauge steel roof curb

product code : RC-RTU-12T-01

WARRANTY

- Components covered for 2 years

COMPONENTS INSTALLED AND PRE-WIRED AT THE FACTORY

- Economizer section hood
- 30 to 54 kW electric coil with SCR modulation
- Exhaust fan and hood
- Fuse-less disconnect switch

FILTERS (Standard)

6 MERV 8 filters (16" x 20" x 2")

BLOWERS & MOTORS (Standard)

- Supply motorized impeller: 2 x 315 mm backwards inclined
- Exhaust motorized impeller: 315 mm backwards inclined
- Sealed, self-lubricating ball bearings
- High-efficiency, direct-drive EC motor

DX EVAPORATOR FROST PREVENTION/CONTROL



2 defrost options available:

- Fan speed reduction during defrost period (offtime defrost)
- Compensation by electric reheating


ELECTRICAL & CONTROLS (Standard)

- Available power supply 208V/3ph/60Hz; 460V/3ph/60Hz; 575V/3ph/60Hz
- Integrated Bacnet MSTP controller kit product code: 699626
- Fuse-less disconnect switch (NEMA 4)
- 24V transformer for controls
- Single point of electrical connection
- Rooftop unit with connection capabilities to Daikin, Samsung, Mitsubishi or other third-party VRFs.*


*Contact your local representative

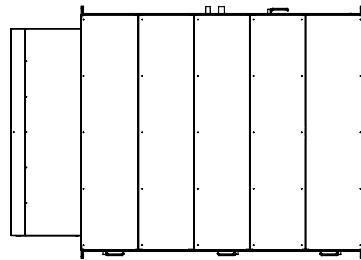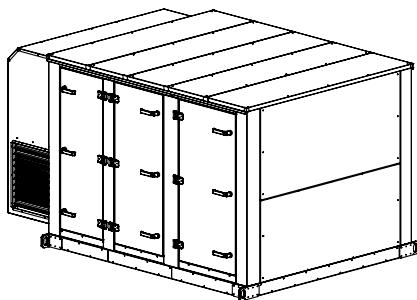


TOP VIEW

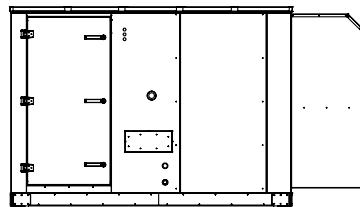


BACK VIEW




LEFT VIEW

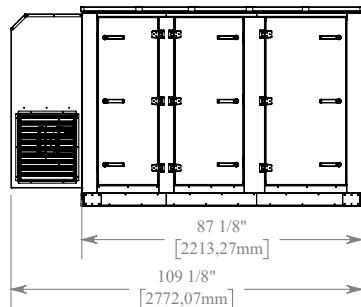

FRONT VIEW


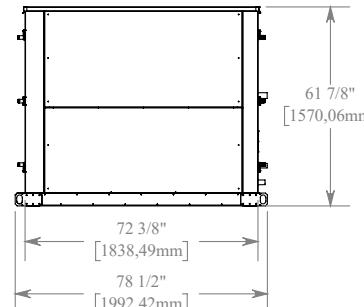



RIGHT VIEW

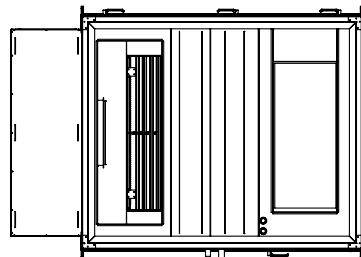


BOTTOM VIEW

RTU_12Te : Dimensions (Standard - Inches)

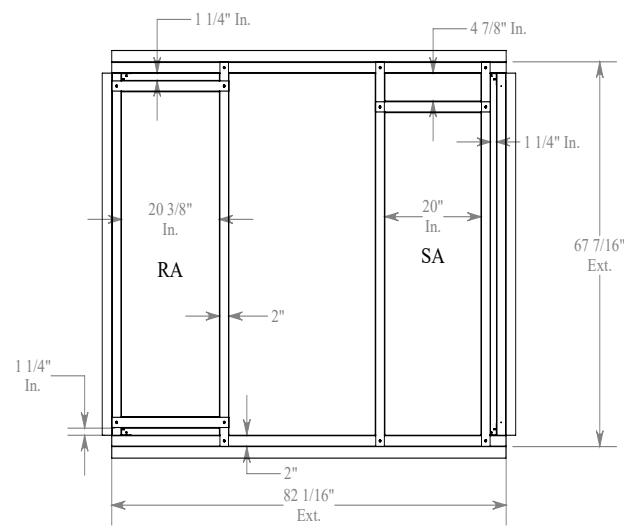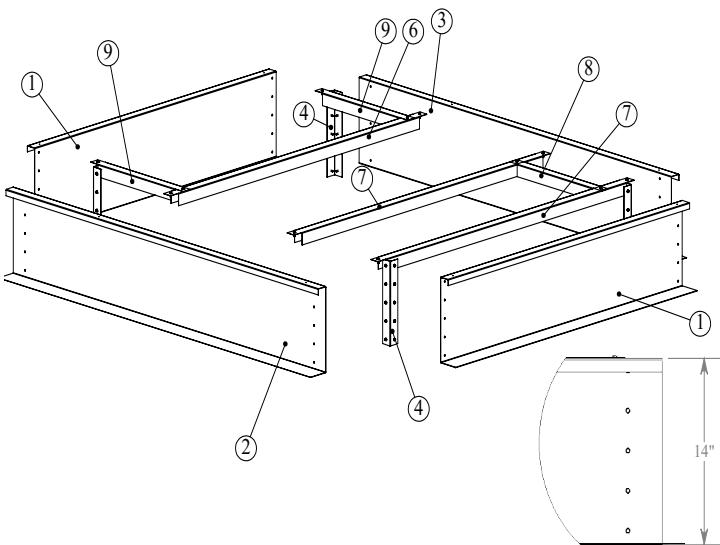

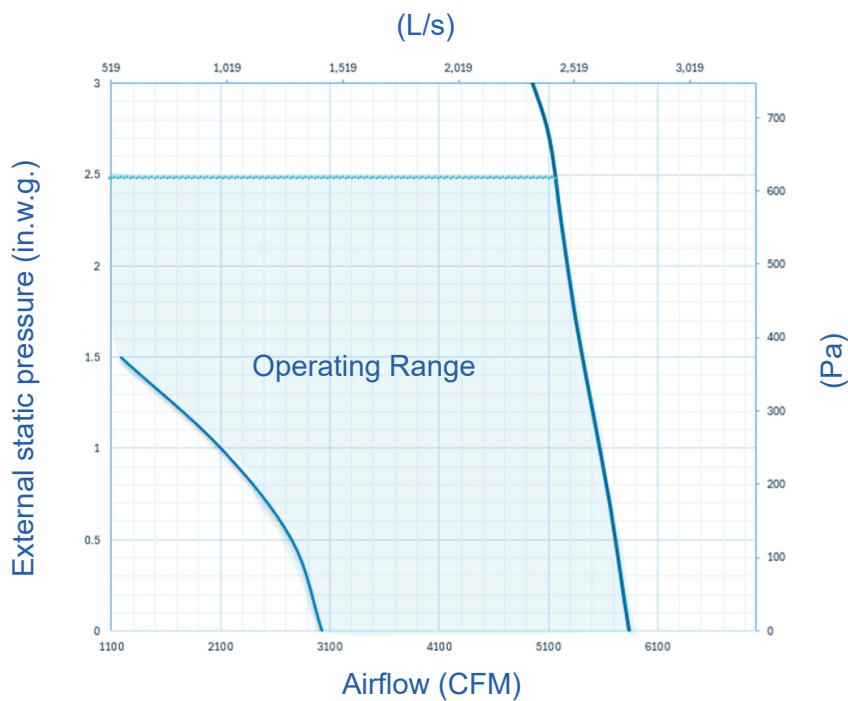

RTU_12Te : Configuration and Weight

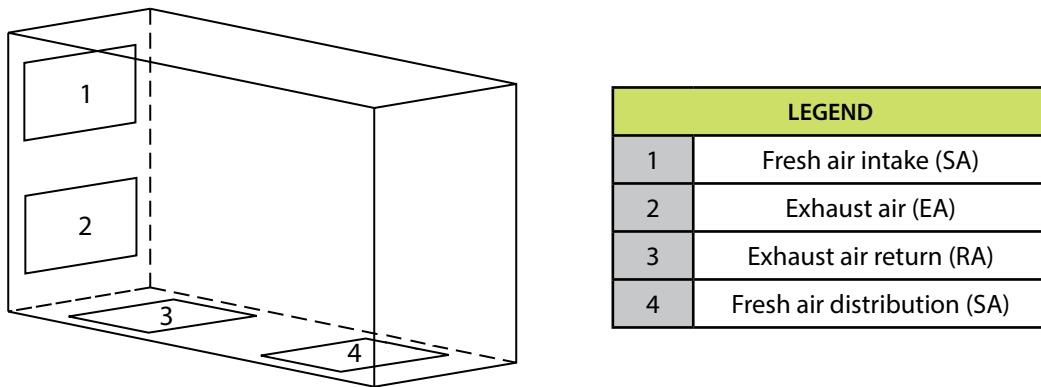

RTU WEIGHT	
Unit Weight	2251 lb
Shipping Weight	2331 lb

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on

©2025 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation

Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.