



Intertek  
C22.2 no113  
UL 1812



# LIGHT COMMERCIAL SERIES

## HRV

### H1800-Fi-N & H1800-Fi-P-N

Heat Recovery Ventilator  
1580 CFM at 0.4 in.w.g (ESP)

Made in Canada	15 YEAR WARRANTY	2 YEAR WARRANTY
	CORE	OTHER PARTS

### PRODUCT DESCRIPTION

The H1800-Fi-N (polypropylene core) heat recovery ventilators provide up to 1580 cubic feet per minute of fresh outdoor air while exhausting an equivalent amount of stale indoor air, creating a well-balanced ventilation system. The H1800-Fi-P-N is a specialty model for indoor pools and other high-humidity applications, with a stainless steel interior, foam filters and anti-corrosion sealant.

These ventilators are recommended for midsized non-residential spaces or dedicated zones within larger buildings such as classrooms, common areas of residential complexes, pools and indoor parking garages.

Designed for versatile indoor installation, Aldes light commercial ventilators can fit almost anywhere and still provide easy access to the internal components for quick maintenance. The units also offer a choice of five continuous operation speeds and a demand-controlled high speed exchange mode.



#### Plate Exchanger

Material: Polypropylene

#### Casing

Material: Painted galvanized steel 22GA  
 Insulation: 1" (25 mm) Fiberglass with FSK  
 Drain Connection: Ø 1/2" (Ø 13 mm)  
 Duct Connections: 24" x 8" (610mm x 203mm)  
 Width: 45-5/8 (1158mm)  
 Height: 29-5/8 (753mm)  
 Depth: 48-7/8 (1242mm)  
 Unit Weight: 245 lb (111 kg); 258 lb (117 kg) with recirculation



#### Mounting

Supplied with base rails. Support rods not included.



#### Electrical Requirements

120V/1p/60 Hz: FLA 13.8A, MCA 14.7A, MOP 20A  
 Terminal block for direct wiring to the building's electrical system.  
 Fused disconnect not included.



#### Frost Control

Cycles controlled by a temperature sensor when outdoor temperatures fall below 23°F (-5°C).

- Standard: Exhaust Defrost
- Optional: Recirculation Defrost (P/N 683960)



#### Blowers

Four backward-inclined motorized impeller, direct-drive PSC, variable speed, external rotor



#### Filters

### KEY FEATURES

Electronically and independently adjustable supply and exhaust blowers (FlexControl).

Painted, heavy-gauge galvanized steel cabinets are attractive, rust-resistant and extremely durable.

Doors on both sides of the unit to allow easy access to filters, cores and motors, no matter the installation constraints.

Fan exhaust frost protection, or optional recirculation defrost kit (factory installed or upgraded in the field).


Four efficient, totally enclosed motors with backward inclined impellers.

Units with polypropylene cores can be used for indoor pools and spas. The H1800-Fi-P-N has a stainless steel interior, foam filters and anti-corrosion sealant for high-humidity environments.

Filter Type	Additional Air Pressure Drop with Optional Filters		Filter type	P/N	#Filters in pack
	Airflow CFM (L/S)				
MERV 8	1000 (472)	1400 (661)	Aluminum	612414	3
	0.08	0.15	MERV 8	612411	3
High Efficiency	0.35	0.48	High Efficiency	612412	3

**Note: This model requires a total of 6 filters. Make sure to get enough packs to meet the required amount.**

# DIMENSIONS

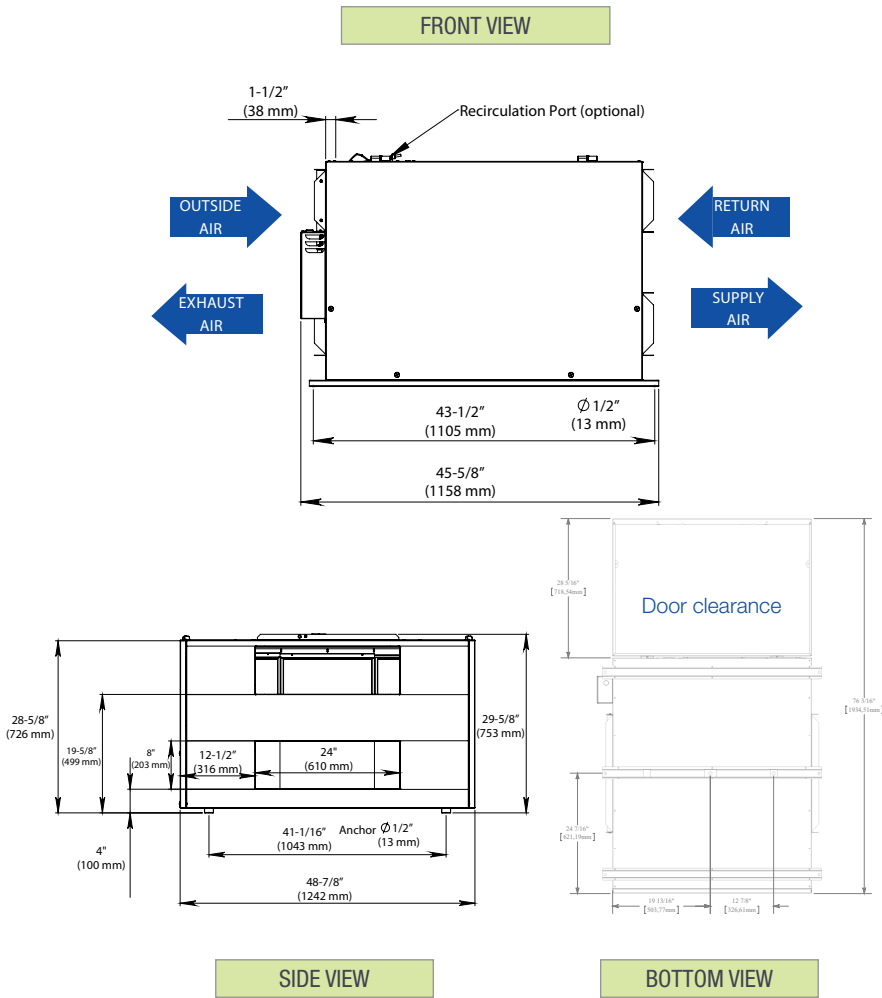

# CONTROLS


0-10 VDC inputs (for supply and exhaust) or multiple fixed speed options

Low-voltage dry contact (24 VAC, 20 VA) for:


- Occupancy Control (On/Off)
- Interlock contacts
- Optional Recirculation Mode

24 VAC, 10 VA output for supply and exhaust dampers (by others)

Compatible with :



Digital Multifunction Control (P/N 611242-FC)



LCD Electronic Multifunction Control (P/N 611227)



20/40/60 Minute Timer (P/N 611228)





Speed Control (Low/Intermittent/High) (P/N 611229)



Mode Control (exchange or recirculation) (P/N 611230)

BACnet™ interface (P/N 611235)

# PERFORMANCE

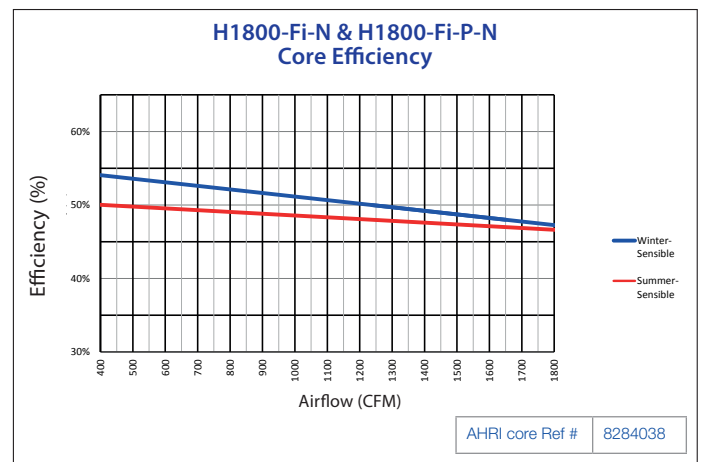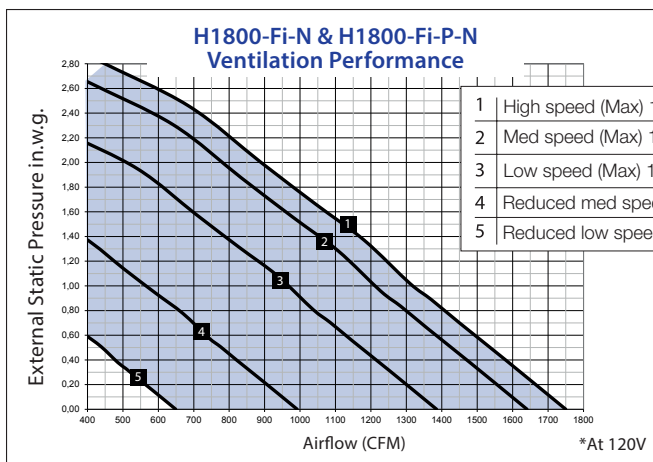

Project:	Architect:
Location:	Engineer:
Model #:	Contractor:
Quantity:	Comments:
Submitted By:	
Date:	

For more information, contact your Aldes sales advisor, visit [aldes-na.com](http://aldes-na.com), call 1.800.255.7749, or find us on

